



## Offshore Special Regulations

Extract for Multihull Category 3

JANUARY 2026 – DECEMBER 2027

© ORC Ltd. 2002, amendments 2003-2026 © World Sailing Limited

Sail Canada Version 1 – 6 January 2026



Official interpretations shall take precedence over these Special Regulations and will be indexed, numbered, dated and displayed on the World Sailing website:

<https://www.sailing.org/inside-world-sailing/rules-regulations/offshore-special-regulations/>

### Language & Abbreviations Used

Mo – Monohulls

Mu – Multihulls

\*\* – means the item applies to all types of boat in all Categories except 5 for which see Appendix B or 6 for which see Appendix C.

The use of the masculine gender shall be taken to mean either gender.

### Style Conventions Used

**RED TYPE** indicates a significant change in 2026.

**BLUE TYPE** indicates Sail Canada prescriptions.

**DOUBLE UNDERLINE TYPE** indicates a term defined in Offshore Special Regulation 1.03.1.

**ITALIC TYPE** indicates a term defined in the Racing Rules of Sailing.

Other than in headings or in offshore special regulation 1.02.1, **BOLD BLACK TYPE** indicates a term defined in the Equipment Rules of Sailing.

**GREEN TYPE** indicates either changes made by the Organizing Authority or required OSR rules that are new to Swiftsure for 2026.

## INTRODUCTION

---

3.1 The remit of the Sub-committee is to advise and report to the Oceanic & Offshore Committee on:

- (a) the maintenance, revision and changes to the World Sailing Offshore Special Regulations governing offshore racing, under licence from ORC Limited, and any interpretations (changes to be biennial with revised editions published in January of each even year, except that matters of an urgent nature affecting safety may be dealt with by changes to the Regulations on a shorter time scale); and
- (b) developments in offshore racing relative to the standards of safety and seaworthiness.

Any queries please email: [technical@sailing.org](mailto:technical@sailing.org)

For any queries regarding Sail Canada prescriptions please email: [offshore@sailing.ca](mailto:offshore@sailing.ca)

## Contents

SECTION 1 – FUNDAMENTAL AND DEFINITIONS.....	3
SECTION 2 – APPLICATION & GENERAL REQUIREMENTS .....	6
SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT .....	7
SECTION 4 – PORTABLE EQUIPMENT .....	16
SECTION 5 – PERSONAL EQUIPMENT.....	22
SECTION 6 – TRAINING.....	24
APPENDIX F – Inspection Card .....	25

## Appendices

- APPENDIX A – Moveable and Variable Ballast
- APPENDIX B – For Inshore Racing
- APPENDIX C – For Inshore Dinghy Racing
- APPENDIX D – A Guide to ISO and other Standards
- APPENDIX E – World Sailing Code for the Organisation of Oceanic Races
- APPENDIX F – *See the link in Contents (above)*
- APPENDIX G – Model Training Course
- APPENDIX H – Model First Aid Training Course
- APPENDIX J – Hypothermia
- APPENDIX K – Drogues and Sea Anchors
- APPENDIX L – Model Keel and Rudder Inspection Procedure
- APPENDIX M – Optional Wording for Organising Authorities’ NoRs or SIs

The appendices, other than appendix F, are available at <https://www.sailing.org>

## SECTION 1 – FUNDAMENTAL AND DEFINITIONS

Categories	1.01	Purpose and Use																
**	1.01.1	The purpose of the Offshore Special Regulations ( <u>OSR</u> ) is to establish uniform minimum equipment, accommodation and training standards for monohull and multihull (excluding proa [asymmetrical catamaran]) boats racing offshore.																
**	1.01.2	The <u>OSR</u> do not replace, but supplement, the requirements of governmental authority, Classification Society certification, the Racing Rules of Sailing ( <u>RRS</u> ), Equipment Rules of Sailing (ERS), class rules and rating systems.																
**	1.01.3	Use of the <u>OSR</u> does not guarantee total safety of the boat and her crew. Particular attention is drawn to the description of <u>OSR</u> for inshore racing which includes that adequate shelter and or effective rescue is available all along the course. This is not included in more onerous <u>OSR</u> categories.																
	1.02	Responsibility of Person in Charge																
**	<a href="#">1.02.1</a>	Under <u>RRS</u> 3 the responsibility for a boat’s decision to participate in a race or continue racing is hers alone. The safety of a boat and her crew is the sole and inescapable responsibility of the <i>person in charge</i> who shall do his best to ensure that the boat is fully found, thoroughly seaworthy and manned by an experienced and appropriately trained crew who are physically fit to face all weather. The <i>person in charge</i> shall also assign a person to take over his responsibilities in the event of his incapacitation.																
**	<a href="#">1.02.2</a>	Neither the establishment of the <u>OSR</u> , nor their use by <i>organising authorities</i> , nor the inspection of a boat under the <u>OSR</u> in any way limits or reduces the complete and unlimited responsibility of the <i>person in charge</i> .																
**	1.02.3	By participating in a race conducted under the <u>OSR</u> , the <i>person in charge</i> , each competitor and boat owner agrees to reasonably cooperate with the <i>organising authority</i> and World Sailing in the development of an independent incident report as specified in <u>OSR</u> 2.02.																
	1.03	Definitions, Abbreviations, Word Usage																
**	1.03.1	Table 1 – Definitions of Terms used in this document																
		<table border="1"> <thead> <tr> <th>Abbreviation</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>#</td> <td>Pound force (lbf)</td> </tr> <tr> <td>ABS</td> <td>American Bureau of Shipping</td> </tr> <tr> <td>AIS</td> <td>Automatic Identification Systems</td> </tr> <tr> <td>Coaming</td> <td>The part of the cockpit, including the transverse after limit, over which water would run when the boat is floating level and the cockpit is filled to overflowing</td> </tr> <tr> <td>COLREGS</td> <td>International Regulations for Preventing Collisions at Sea</td> </tr> <tr> <td>Contained Cockpit</td> <td>A cockpit where the combined area open aft to the sea is less than 50% maximum cockpit depth x maximum cockpit width</td> </tr> <tr> <td>Crewmember</td> <td>Every person on board</td> </tr> </tbody> </table>	Abbreviation	Description	#	Pound force (lbf)	ABS	American Bureau of Shipping	AIS	Automatic Identification Systems	Coaming	The part of the cockpit, including the transverse after limit, over which water would run when the boat is floating level and the cockpit is filled to overflowing	COLREGS	International Regulations for Preventing Collisions at Sea	Contained Cockpit	A cockpit where the combined area open aft to the sea is less than 50% maximum cockpit depth x maximum cockpit width	Crewmember	Every person on board
Abbreviation	Description																	
#	Pound force (lbf)																	
ABS	American Bureau of Shipping																	
AIS	Automatic Identification Systems																	
Coaming	The part of the cockpit, including the transverse after limit, over which water would run when the boat is floating level and the cockpit is filled to overflowing																	
COLREGS	International Regulations for Preventing Collisions at Sea																	
Contained Cockpit	A cockpit where the combined area open aft to the sea is less than 50% maximum cockpit depth x maximum cockpit width																	
Crewmember	Every person on board																	

## SECTION 1 – FUNDAMENTAL AND DEFINITIONS

### Categories

DSC	Digital Selective Calling
EN	European Norm
EPIRB	Emergency Position-Indicating Radio Beacon
ERS	World Sailing - Equipment Rules of Sailing
First Launch	Month & year of the first launching when the individual boat, was completed and equipped for sailing
GMDSS	Global Maritime Distress & Safety System
GNSS	Global Navigation Satellite System
Hatch	The term hatch includes the entire hatch assembly including the lid or cover as part of that assembly
HMPE	High Modulus Polyethylene (Dyneema <sup>®</sup> /Spectra <sup>®</sup> or equivalent)
IBRD	International Beacon Registration Database
IMO	International Maritime Organization
ISAF	International Sailing Federation – (now World Sailing)
ISO	International Standard Organization or International Organization for Standardization
Jackstay	A <u>securely fastened</u> webbing or rope which permits a <u>crewmember</u> to move from one part of the boat to another without having to unclip a deck safety harness <u>tether</u>
L <sub>H</sub>	Hull Length as defined by the ERS
Lifeline	Rope or wire line rigged as guardrail/guardline around the deck
LSA	<u>IMO</u> International Life-Saving Appliance Code
L <sub>WL</sub>	(Length of) loaded waterline
Moveable Ballast	Material carried for the sole purpose of increasing weight and/or influencing stability and/or trim and which may be moved transversely but not varied in weight while a boat is racing
ORC	Offshore Racing Congress (formerly Offshore Racing Council)
OSR	Offshore Special Regulation(s)
Permanently Installed	The item is effectively built-in by e.g. bolting, welding, glassing etc. and may not be removed for or during racing
PLB	Personal Locator Beacon
Rode	Rope, chain, or a combination of both, which is used to connect an anchor to the boat
RRS	World Sailing – Racing Rules of Sailing

## SECTION 1 – FUNDAMENTAL AND DEFINITIONS

### Categories

Securely Fastened	Held strongly in place by a method (e.g. rope lashings, wing nuts) which will safely retain the fastened object in severe conditions including a 180° capsize and allows for the item to be removed and replaced during racing
SOLAS	Safety of Life at Sea Convention
SSS	The Safety and Stability Screening numeral
STCW	Standards of Training, Certification and Watchkeeping for Seafarers
STIX	ISO 12217-2 Stability Index
Tether	A line or webbing used to connect a deck safety harness to a strong point or <u>jackstay</u>
Variable Ballast	Water carried for the sole purpose of influencing stability and/or trim and which may be varied in weight and/or moved while a boat is racing.
World Sailing	formerly the International Sailing Federation or <u>ISAF</u>

\*\* 1.03.2 The words “shall” and “must” are mandatory, and “should” and “may” are permissive.

## SECTION 2 – APPLICATION & GENERAL REQUIREMENTS

---

Categories	2.01	Categories of Events
**		<i>Organising authorities</i> shall select from one of the following categories and may modify the <u>OSR</u> to suit local conditions.
MoMu3	2.01.4	Category 3
		Races across open water, most of which is relatively protected or close to shorelines.
**	2.02	Incident Reporting
		The <i>organising authority</i> of a race will establish whether any incidents occurred, which if reported would likely be relevant to evolving the Offshore Special Regulations, the plan review process, or in increasing safety. The <i>organising authority</i> will follow any guidelines issued by World Sailing concerning incident reporting.
**	2.03	Inspection
		A boat may be inspected at any time. If she fails to comply with the <u>OSR</u> her entry may be rejected, or she will be subject to protest.
**	<a href="#">2.04</a>	General Requirements
**	2.04.1	All equipment required by <u>OSR</u> shall:
**		a) function properly,
**		b) be regularly checked, cleaned and serviced,
**		c) if it has an expiry date, it will not have exceeded its expiry date whilst racing,
**		d) when not in use to be stowed in conditions which minimise deterioration,
**		e) be readily accessible, and
**		f) be of a type, size and capacity suitable and adequate for the intended use and size of the boat.
**	<a href="#">2.04.2</a>	Heavy items shall be <u>permanently installed</u> or <u>securely fastened</u> .

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories		A boat shall be/have:
	3.01	Strength of Build and Rig
**	3.01.1	Properly rigged, fully seaworthy and shall meet the <u>OSR</u> .
**	3.01.2	Equipped with shrouds and at least one forestay that shall remain connected to the mast and the boat while racing (not applicable to boats with free-standing masts).
**	3.01.3	The forestay referenced above shall be sized and connected in a way that ensures it is capable of withstanding the full sailing loads independent of any headsail luff load capacity.
	<a href="#">3.02</a>	Watertight and Structural Integrity of a Boat
**	3.02.1	Essentially watertight and all openings shall be capable of being immediately secured. Centreboard or daggerboard trunks and the like shall not open into the interior of a hull except via a watertight maintenance <u>hatch</u> with the opening entirely above the waterline.
	3.05	Stability and Flotation – Multihulls
Mu0,1,2,3,4	<a href="#">3.05.1</a>	Watertight bulkheads and compartments (which may include <u>permanently installed</u> flotation material) in each hull, to ensure that the boat is effectively unsinkable and capable of floating in a stable position with at least half the length of one hull flooded (see <u>OSR</u> 3.13.2).
Mu0,1,2,3,4	3.05.2	If <u>first launched</u> after 1998, a boat shall have transverse watertight bulkheads at intervals of not more than 4 m (13'-3") in every hull without accommodations.
Mu0,1,2,3,4	3.05.3	Designed and built to resist capsize.
	3.07	Exits, Escape Hatches, Underside Clipping Points and Handholds – Multihulls
	<a href="#">3.07.1</a>	Exits
Mu0,1,2,3		a) At least two exits in each hull which contains accommodations.
	<a href="#">3.07.2</a>	Escape Hatches – General
Mu0,1,2,3,4		a) If 12 m (39'-4") <u>L<sub>H</sub></u> and greater each hull which contains accommodation shall have:
Mu0,1,2,3,4		i an escape <u>hatch</u> for access to and from the hull in the event of an inversion,
Mu0,1,2,3,4		ii if <u>first launched</u> after 2002, a minimum clearance diameter through each escape <u>hatch</u> of 450 mm (18") or when an escape <u>hatch</u> is not circular, sufficient clearance to allow a <u>crewmember</u> to pass through fully clothed,
Mu0,1,2,3,4		iii each escape <u>hatch</u> to be above the waterline when the boat is inverted,
Mu0,1,2,3,4		iv if <u>first launched</u> after 2000, each escape <u>hatch</u> to be at or near the midships station.
Mu0,1,2,3,4		b) Each escape <u>hatch</u> shall have been opened both from inside and outside within 6 months prior to the race.
	3.07.3	Escape Hatches – Catamarans
Mu0,1,2,3,4		If <u>first launched</u> after 2002, each escape <u>hatch</u> to be on the side nearest the vessel's central axis.

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories	A boat shall be/have:
Mu0,1,2,3,4	<p>3.07.4 Escape Hatches – Trimarans</p> <p>a) If <u>first launched</u> after 2002 with <u>L<sub>H</sub></u> 12 m (39’-4”) and greater, at least two escape <u>hatches</u> in compliance with the dimensions in <u>OSR</u> 3.07.2 a) ii,</p>
Mu0,1,2,3,4	<p><a href="#">3.07.5</a> Underside Clipping Points and Handholds</p> <p>On the underside, appropriate handholds and clipping points of sufficient capacity to enable all <u>crewmembers</u> to hold on and/or clip on securely.</p>
Mu0,1,2,3,4	a) On a trimaran these shall be around the central hull.
Mu0,1,2,3,4	b) On a catamaran <u>first launched</u> after 2002, with a central nacelle, these shall be around the central nacelle.
Mu2,3,4	<p>3.07.6 Escape Hatch Alternatives</p> <p>If a boat has <u>L<sub>H</sub></u> less than 12 m (39’-4”) it shall have escape <u>hatches</u> in compliance with <u>OSR</u> 3.07.2 a), 3.07.4 a) and 3.07.4 b) or:</p>
Mu2,3,4	a) in each hull which contains accommodation, a station where an emergency <u>hatch</u> may be cut. The cutting line shall be clearly marked both inside and outside with an outline and the words “ESCAPE CUT HERE”, and
Mu2,3,4	b) tools suitable for cutting the emergency <u>hatch</u> , ready for immediate use, adjacent to the cutting site. Each tool shall be secured to the vessel by a lanyard.
**	<p>3.08 Hatches &amp; Companionways</p> <p><a href="#">3.08.1</a> <u>Hatch</u> covers forward of the maximum beam station shall not open toward the interior of the boat, except <u>hatches</u> in the side of a coachroof or ports having an area of less than 0.071 m<sup>2</sup> (110 in<sup>2</sup>).</p>
**	<a href="#">3.08.2</a> A <u>hatch</u> , including a <u>hatch</u> over a locker shall be:
**	a) permanently attached and capable of being firmly shut immediately and remaining firmly shut in a 180° capsize,
**	<a href="#">3.08.3</a> <u>Hatches</u> not conforming with <u>OSR</u> 3.08.1 and <u>OSR</u> 3.08.2 shall be clearly labelled and used in accordance with the following instruction “NOT TO BE OPENED AT SEA”.
**	<a href="#">3.08.4</a> Companionway <u>hatches</u> :
**	a) fitted with a strong securing arrangement which shall be operable from the exterior and interior even when the boat is inverted,
**	b) blocking devices:
**	i capable of being retained in position with the <u>hatch</u> open or shut,
**	ii secured to the boat (e.g. by lanyard) for the duration of the race, and
**	iii permit exit in the event of inversion.
Mu0,1,2,3,4	<a href="#">3.08.7</a> If a multihull with a companionway <u>hatch</u> extending below the local sheerline a boat shall either:
Mu0,1,2,3,4	a) have a minimum sill height of 300 mm (12”) and be capable of being blocked off up to the level of the local sheerline whilst giving access to the interior with the blocking device(s) in place, or
Mu0,1,2,3	b) be in compliance with <u>ISO</u> 11812 to design category A.

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories	A boat shall be/have:
	3.09 Cockpits
	<a href="#">3.09.1</a> General
**	a) cockpits shall self-drain quickly by gravity at all angles of heel and are permanently incorporated as an integral part of the boat,
**	b) a cockpit sole shall be at least 2% <u>LWL</u> above the waterline (or in IMS boats with <u>first launch</u> before 2003, at least 2% L above the waterline), and
**	c) a bow, lateral, central, or stern well is a cockpit for the purposes of <u>OSR</u> 3.09.
	3.09.2 Cockpit Volume
**	The maximum combined volume below lowest <u>coamings</u> of all <u>contained cockpits</u> shall be:
MoMu2,3,4	b) series date before April 1992: 9% ( <u>LWL</u> x maximum beam x freeboard abreast the cockpit),
**	c) series date after March 1992 as above for the appropriate category except that “lowest <u>coamings</u> ” shall not include any aft of the FA station (the transverse station at which the upper corner of the transom meets the sheerline) and no extension of a cockpit aft of the working deck shall be included in calculation of cockpit volume.
	3.09.3 Cockpit Drains
**	Cockpit drain cross section area of unobstructed openings (after allowance for screens if fitted) shall be at least that of:
**	a) if less than 8.5 m (28') <u>LH</u> : 2 x 25 mm (1”) diameter or equivalent,
**	b) if 8.5 m (28') <u>LH</u> or greater: 4 x 20 mm (3/4”) diameter or equivalent.
	<a href="#">3.10</a> Sea Cocks or Valves
**	<u>Permanently installed</u> sea cocks or valves on all through-hull openings below the waterline except for integral deck scuppers and instrument through-hulls.
	3.11 Sheet Winches
**	Sheet winches mounted in such a way that an operator is not required to be substantially below deck.
	<a href="#">3.12</a> Mast Step
**	The heel of a keel stepped mast <u>securely fastened</u> to the mast step or adjoining structure.
	3.13 Watertight Bulkheads
Mo0Mu0,1,2, 3,4	<a href="#">3.13.1</a> Either a watertight “crash” bulkhead within 15% of <u>LH</u> from the bow and abaft the forward end of <u>LWL</u> , or <u>permanently installed</u> closed-cell foam buoyancy effectively filling the forward 30% <u>LH</u> of the hull.
Mo0Mu0,1,2, 3,4	3.13.2 Any required watertight bulkhead to be strongly built to take a full head of water pressure without allowing any leakage into the adjacent compartment.

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories	A boat shall be/have:
	<a href="#">3.14</a> Pulpits, Stanchions, Lifelines <b>Recommended</b>
	3.14.1 General
**	The perimeter of the deck surrounded by system of <u>lifelines</u> and pulpits as follows:
**	a) continuous <u>lifelines</u> fixed only at (or near) the bow and stern. However, a gate on each side of a boat is permitted. Except at its end fittings and at gates, the movement of a <u>lifeline</u> in a fore-and-aft direction shall not be constrained. Temporary sleeving shall not modify tension in the <u>lifeline</u> ,
**	b) minimum heights of <u>lifelines</u> and pulpit rails above the perimeter of the deck and vertical openings:
**	i upper: 600 mm (24”),
**	ii intermediate: 230 mm (9”),
**	iii vertical opening: no greater than 380 mm (15”) except that on a boat with a series date before 1993 where it shall be no greater than 560 mm (22”),
MoMu3,4	iv a boat less than 8.5 m (28') <u>L<sub>H</sub></u> may use a single <u>lifeline</u> system with a height between 450 mm (18”) and 560 mm (22”).
**	c) <u>lifelines</u> permanently supported at intervals of not more than 2.2 m (7'-2 1/2”) and not passing outboard of supporting stanchions,
**	d) pulpit and stanchion bases <u>permanently installed</u> with pulpits and stanchions mechanically retained in their bases,
**	e) the outside of pulpit and stanchion base tubes no further inboard from the perimeter of the deck than 5% of boat beam or 150 mm (6”), whichever is greater, nor further outboard than the perimeter of the deck. If a boat's series date is after 2024 the perimeter of the deck is defined as the hull and deck intersection at an angle of not more than 15° to the horizontal in a transverse plane when the boat is upright,
**	f) stanchions straight and vertical except that:
**	i within the first 50 mm (2”) from the deck, stanchions shall not be displaced horizontally from the point at which they emerge from the deck or stanchion base by more than 10 mm (3/8”),
**	ii stanchions may be angled to not more than 10° from vertical at any point above 50 mm (2”) from the deck.
**	g) a bow pulpit may be open provided the opening between the pulpit and any part of the boat does not exceed 360 mm (14”),

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories

A boat shall be/have:

\*\*

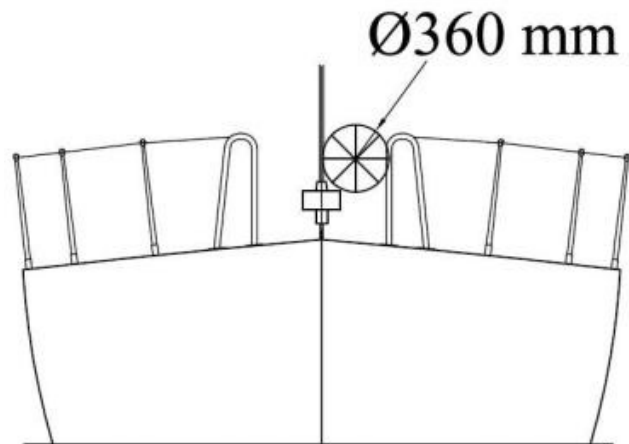


Figure 2 – Diagram Showing Pulpit Opening

\*\*

h) lifelines may terminate at or pass through adequately braced stanchions set inside and overlapping the bow pulpit,

\*\*

i) when a deflecting force of 4 kg (8.8 #) is applied to a lifeline at the mid-point of the longest span between supports that are aft of the mast, the deflection shall not exceed:

\*\*

i 50 mm (2") for an upper or single lifeline,

\*\*

ii 120 mm (4 ¾") for an intermediate lifeline.

### 3.14.2 Special Requirements for Pulpits, Stanchions, Lifelines on Multihulls

Mu\*\*

When on a boat it is impractical to precisely follow OSR regarding pulpits, stanchions, lifelines, the regulations for monohulls shall be followed as closely as possible.

### 3.14.3 Lifeline Specifications

Mo4Mu\*\*

b) lifelines of either:

Mo4Mu\*\*

i stranded stainless steel wire, or

Mo4Mu\*\*

ii HMPE,

\*\*

c) The minimum diameter is specified in table 5 below,

\*\*

d) Stainless steel lifelines shall be uncoated and used without close-fitting sleeving, however, temporary sleeving may be fitted provided it is regularly removed for inspection,

\*\*

e) A lanyard of synthetic rope may be used to secure lifelines provided the gap it closes does not exceed 100 mm (4"). This lanyard shall be replaced annually,

\*\*

f) All components of the lifeline enclosure system shall have a breaking strength no less than the lifeline,

Mo4Mu\*\*

g) When HMPE is used, it shall be protected from chafe and spliced in accordance with the manufacturer's recommended procedures.

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories

\*\*

A boat shall be/have:

Table 5 – Lifeline Diameter Requirements

<u>LH</u>	Wire Min. <u>lifeline</u> diameter	<u>HMPE</u> rope (Single braid) min. <u>lifeline</u> diameter	<u>HMPE</u> Core (Braid on braid) min. <u>lifeline</u> outside diameter
under 8.5 m (28')	3 mm (1/8")	4 mm (5/32")	6 mm (1/4")
8.5 m – 13 m	4 mm (5/32")	5 mm (3/16")	7 mm (9/32")
over 13 m (42' 8")	5 mm (3/16")	5 mm (3/16")	7 mm (9/32")

### 3.15 Multihull Nets or Trampolines

#### 3.15.1 General

Mu0,1,2,3,4

The words “net” and “trampoline” are interchangeable. A net shall be:

Mu0,1,2,3,4

a) essentially horizontal,

Mu0,1,2,3,4

b) made from durable woven webbing, water permeable fabric, or mesh with openings not larger than 5 cm (2”) in any dimension. Attachment points shall be planned to avoid chafe. The junction between a net and a boat shall present no risk of foot trapping,

Mu0,1,2,3,4

c) solidly fixed at regular intervals on transverse and longitudinal support lines and shall be fine stitched to a bolt rope, and

Mu0,1,2,3,4

d) able to carry the full weight of the crew either in normal working conditions at sea or in case of capsize when the boat is inverted.

#### 3.15.2 Trimarans with Double Crossbeams

Mu0,1,2,3,4

A trimaran with double crossbeams shall have nets on each side covering:

Mu0,1,2,3,4

a) the area formed by the crossbeams, central hull and outriggers,

Mu0,1,2,3,4

b) the triangles formed by the aft end of the central pulpit, the mid-point of each forward crossbeam, and the intersection of the crossbeam and the central hull,

Mu0,1,2,3,4

c) the triangles formed by the aftermost part of the cockpit or steering position (whichever is furthest aft), the mid-point of each after crossbeam, and the intersection of the crossbeam and the central hull, except that:

Mu0,1,2,3,4

d) OSR 3.15.2(c) is not a requirement when cockpit coamings and/or lifelines are present which comply with the minimum height requirements in OSR 3.14.

#### 3.15.3 Trimarans with Single Crossbeams

Mu0,1,2,3,4

A trimaran with a single crossbeam shall have nets between the central hull and each outrigger on each side between two straight lines from the intersection of the crossbeam and the outrigger, respectively to the aft end of the pulpit on the central hull, and to the aftermost point of the cockpit or steering position on the central hull (whichever is furthest aft).

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories	A boat shall be/have:
Mu0,1,2,3,4	<p>3.15.4 Catamarans</p> <p>A catamaran shall have nets covering the area defined laterally by the hulls and longitudinally by transverse stations through the forestay base and the aftermost point of the boom lying fore and aft. However, a catamaran with a central nacelle (non-immersed) may satisfy the regulations for a trimaran.</p>
MoMu3,4	<p>3.18 Toilet</p> <p><a href="#">3.18.2</a> <u>Securely installed</u> toilet or fitted bucket.</p>
MoMu1,2,3,4	<p>3.19 Bunks</p> <p><a href="#">3.19.1</a> <u>Securely installed</u> bunks.</p>
MoMu0,1,2,3	<p><a href="#">3.20</a> Cooking Facilities</p> <p><u>Securely installed</u> cooking stove, capable of being operated safely at sea, with fuel shutoff control.</p>
MoMu2,3	<p>3.21 Drinking Water Tanks &amp; Drinking Water</p> <p><a href="#">3.21.1</a> Drinking Water Tanks</p> <p>c) <u>Securely installed</u> delivery pump and water tank(s), or reusable container(s) capable of providing drinking water for the likely duration of the passage.</p>
MoMu1,2,3	<p><a href="#">3.21.3</a> Emergency Drinking Water</p> <p>a) at least 2 L (0.5 US Gal) per person of drinking water for emergency use in a dedicated and sealed container or container(s). <b>Recommended</b></p>
**	<p><a href="#">3.22</a> Hand Holds</p> <p>Adequate hand holds fitted below deck.</p>
**	<p>3.23 Bilge Pumps and Buckets</p> <p><a href="#">3.23.1</a> a) two strong buckets, each with a lanyard and of at least 9 L (2.4 US Gal) capacity,</p>
Mu0,1,2,3,4	<p>e) provision to pump out all watertight compartments (except those filled with impermeable buoyancy).</p>
**	<p><a href="#">3.23.2</a> All required <u>permanently installed</u> bilge pumps shall be operable with all cockpit seats, <u>hatches</u> and companionways shut and with <u>permanently installed</u> discharge pipe(s) of sufficient capacity.</p>
**	<p>3.23.3 Bilge pumps shall not be connected to cockpit drains and shall not discharge into a <u>contained cockpit</u>.</p>
**	<p>3.23.4 Bilge pumps shall be readily accessible for maintenance and for clearing out debris.</p>
**	<p>3.23.5 All removable bilge pump handles retained by a lanyard.</p>
MoMu0,1,2,3	<p><a href="#">3.24</a> Compass</p> <p>Marine magnetic compass capable of being used as a steering compass:</p>
**	<p>a) <u>Permanently installed</u> marine magnetic steering compass, independent of any power supply, correctly adjusted with deviation card,</p>
MoMu0,1,2,3	<p>b) a second compass which may be hand-held and/or electronic.</p>
**	<p><a href="#">3.25</a> Halyards</p> <p>3.25.1 A minimum of two halyards, each capable of hoisting a sail, on each mast.</p>

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

---

Categories	A boat shall be/have:
MoMu0,1,2,3	3.25.2 No halyard shall be locked, lashed, or otherwise secured to the mast in a way that requires a person to go aloft to lower a sail in a controlled manner, except for a headsail in use with a furling device.
**	3.27 Navigation Lights
**	<a href="#">3.27.1</a> Shall carry navigation lights required by it's national safety authority.
MoMu0,1,2,3	<a href="#">3.27.2</a> Mounted so that they will not be obscured by sails or the heeling of the boat.
MoMu0,1,2,3	<a href="#">3.27.3</a> Reserve lights having the same specifications as above, and that can be powered independently.
**	<a href="#">3.27.4</a> Spare bulbs (not required for LED).
	3.28 Engines, Generators, Fuel
	<a href="#">3.28.1</a> Propulsion Engines
	A boat shall have a mechanical propulsion system that is ready for immediate use.
**	3.28.2 Generator
**	If an optional generator separate from the propulsion engine is carried, it shall be installed in accordance with the manufacturer's guidelines.
MoMu0,1,2,3	<a href="#">3.28.3</a> Liquid Fuel Systems
MoMu0,1,2,3	a) all fuel tanks for storage of liquid fuels shall be rigid (but may have <u>permanently installed</u> flexible linings) and shall have a shutoff valve,
MoMu0,1,2,3	b) at the start a boat with a combustion engine shall carry sufficient fuel to meet charging requirements for the duration of the race and to motor at the above minimum speed for at least 5 hours.
**	<a href="#">3.28.4</a> Battery Systems
**	a) batteries installed after 2011 shall be of the sealed type from which liquid electrolyte cannot escape,

## SECTION 3 – STRUCTURAL FEATURES, STABILITY, FIXED EQUIPMENT

Categories		A b at shall be/have:
**		b) at the start a boat with an electric engine shall carry sufficient capacity to meet electrical requirements for the duration of the race and to motor at the above minimum speed for at least 5 hours.
MoMu0,1,2,3		c) a dedicated engine/generator starting battery when an electric starter is the only method for starting the engine and/or separate generator,
	3.29	Communications Equipment, GNSS, Radar, AIS
Mo1,2,3	<a href="#">3.29.1</a>	A hand-held marine VHF transceiver, <b>with minimum 5 W output power</b> , for each grab bag, watertight or with a waterproof cover. When not in use to be stowed in the grab bag (see <a href="#">OSR 4.21</a> ).
Mu1,2,3,4		
**	<a href="#">3.29.4</a>	A second radio receiver, which may be the handheld VHF in <a href="#">OSR 3.29.1</a> above, capable of receiving weather bulletins.
MoMu0,1,2,3	<a href="#">3.29.5</a>	A marine radio transceiver with an emergency antenna when the regular antenna depends upon the mast. <a href="#">Sail Canada prescribes that a boat shall have a VHF radio transceiver in accordance with 3.29.6.</a>
MoMu0,1,2,3	<a href="#">3.29.6</a>	If the marine radio transceiver is a VHF:
MoMu0,1,2,3		a) a minimum rated output power of 25 W,
MoMu1,2,3		b) if installed after 2015 be <a href="#">DSC</a> capable,
MoMu3		e) a masthead antenna and co-axial feeder cable with not more than 40% power loss, <b>Recommended</b>
MoMu1,2,3		f) <a href="#">DSC</a> capable VHF transceivers shall be programmed with an assigned MMSI (unique to the boat), be connected to a <a href="#">GNSS</a> receiver and be capable of making distress alert calls as well as sending and receiving a <a href="#">DSC</a> position report with another <a href="#">DSC</a> equipped station,
MoMu3		h) <b>if the number of <a href="#">crewmembers</a> is fewer than 3, have an external speaker in the cockpit.</b>
MoMu0,1,2,3	<a href="#">3.29.7</a>	An <a href="#">AIS</a> Transponder which either:
MoMu0,1,2,3		a) <b>shares the masthead VHF antenna via a low loss <a href="#">AIS</a> antenna splitter, or</b>
MoMu0,1,2,3		b) <b>has a dedicated <a href="#">AIS</a> antenna not less than 38 cm (15”) in length mounted with its base not less than 3 m (10’) above the waterline and co-axial feeder cable with not more than 40% power loss.</b>
MoMu3	<a href="#">3.29.8</a>	A <a href="#">GNSS</a> .

## SECTION 4 – PORTABLE EQUIPMENT

Categories		A boat shall have:
	4.01	Sail Letters & Numbers
**	<a href="#">4.01.1</a>	Identification on sails which complies with <u>RRS</u> 77 and <u>RRS</u> Appendix G.
MoMu0,1,2,3	<a href="#">4.01.2</a>	An alternative means of displaying identification as required under <u>RRS</u> Appendix G for a mainsail, to be displayed when none of the numbered sails are set.
	4.02	Search and Rescue Visibility
Mo0,1Mu0,1,2,3,4	<a href="#">4.02.3</a>	From 2027 (for Mo0,1) a 1 m <sup>2</sup> (11 ft <sup>2</sup> ) area of highly visible pink, orange or yellow showing when the boat is inverted.
	<a href="#">4.03</a>	Soft Wood Plugs
**		A tapered soft wood plug stowed adjacent to every through-hull opening.
	4.04	Jackstays and Clipping Points
MoMu0,1,2,3	4.04.1	<u>Permanently Installed</u> fittings for <u>jackstay</u> ends and clipping points.
MoMu0,1,2,3	<a href="#">4.04.2</a>	<u>Jackstays</u> which shall:
MoMu0,1,2,3		a) be independent on each side of the deck,
MoMu0,1,2,3		b) enable a <u>crewmember</u> to move readily between the working areas on deck and the cockpit(s) with the minimum of clipping and unclipping operations,
MoMu0,1,2,3		c) have a breaking strength of 2040 kg (4500#) and be uncoated and non-sleeved stainless steel 1 x 19 wire of minimum diameter 5 mm (3/16”), webbing or <u>HMPE</u> rope.
MoMu0,1,2,3	<a href="#">4.04.3</a>	Clipping points which shall:
MoMu0,1,2,3		a) be adjacent to stations such as the helm, sheet winches and masts, where <u>crewmembers</u> work,
MoMu0,1,2,3		b) enable a <u>crewmember</u> to clip on before coming on deck and unclip after going below,
MoMu0,1,2,3		c) enable two-thirds of the crew to be simultaneously clipped on without depending on <u>jackstays</u> ,
Mu0,1,2,3		d) on a trimaran with a rudder on the outrigger, permit a <u>crewmember</u> to repair the steering mechanism whilst attached to a clipping point.
	4.05	Fire Fighting Equipment
**	<a href="#">4.05.1</a>	A fire blanket adjacent to every cooking device. <b>Recommended</b>
MoMu1,2,3	<a href="#">4.05.2</a>	2 fire extinguishers, each with 2 kg of dry powder or equivalent, in different parts of the boat.
	4.06	Anchors
MoMu1,2,3	<a href="#">4.06.1</a>	<b>1 un-modified</b> anchors that meet the anchor manufacturer’s recommendation based on the boat’s dimensions with suitable combination of chain and rope, ready for immediate assembly, and ready for deployment within 5 minutes except that for a boat less than 8.5 m (28’) <u>LH</u> there shall be 1 anchor meeting the same criteria.

## SECTION 4 – PORTABLE EQUIPMENT

Categories		A boat shall have:
	<a href="#">4.07</a>	Flashlights and Searchlights
Mo0,1,2,3 Mu0,1,2,3,4		Flashlights and searchlights need to be watertight (min IP67 rated), need to have spare batteries or be rechargeable, have spare bulbs or be an LED type, and need to provide at least 400 Lumens. The following need to be provided:
MoMu0,1,2,3		a) a searchlight, suitable for searching for a person overboard at night and for collision avoidance,
Mo0,1,2,3 Mu0,1,2,3,4		b) stowed in each grab bag (see <a href="#">OSR 4.21</a> ), a flashlight. <b>Recommended</b>
Mo0,1,2,3 Mu0,1,2,3,4		c) for boats with only two <u>crewmembers</u> , the searchlight detailed in 4.07 a) shall be accessible from the cockpit without having to go below deck.
	<a href="#">4.08</a>	First Aid Manual and First Aid Kit
**		A First Aid Manual and First Aid Kit. The contents and storage of the First Aid Kit shall reflect the likely conditions and duration of the passage, and the number of <u>crewmembers</u> .
	<a href="#">4.09</a>	Foghorn
**		A foghorn.
	4.10	Radar Reflector
**	<a href="#">4.10.1</a>	A passive radar reflector with:
**		a) octahedral circular plates of minimum diameter 30 cm (12”),
**		b) octahedral rectangular plates of minimum diagonal dimension 40 cm (16”), or
**		c) a non-octahedral reflector with a documented root mean square minimum Radar Cross Section (RCS) area of 2 m <sup>2</sup> (22 ft <sup>2</sup> ) from 0–360° of azimuth and ±20° of heel.
	4.11	Navigation Equipment
MoMu0,1,2,3	<a href="#">4.11.1</a>	Navigational charts (not solely electronic) and chart plotting equipment.
	<a href="#">4.12</a>	Safety Equipment Location Chart
**		A safety equipment location diagram in durable waterproof material, clearly displayed in the main accommodation, marked with the location of principal items of safety equipment.
	4.13	Depth, Speed and Distance Instruments
MoMu0,1,2,3	<a href="#">4.13.1</a>	A knotmeter or distance measuring instrument (log).
MoMu1,2,3,4	<a href="#">4.13.2</a>	A depth sounder.
	4.15	Emergency Steering <b>Recommended</b>
MoMu0,1,2,3	<a href="#">4.15.1</a>	An emergency tiller capable of being fitted to the rudder stock except when:
MoMu0,1,2,3		a) the principal method of steering is by means of an unbreakable metal tiller,
MoMu0,1,2,3		b) there are two methods (e.g. tillers, wheels) of controlling a rudder, neither of which shares components with the other except for the rudder stock.
MoMu0,1,2,3	<a href="#">4.15.2</a>	A proven method of emergency steering with the rudder disabled.
	4.16	Tools and Spare Parts
**	<a href="#">4.16.1</a>	Tools and spare parts, suitable for the duration and nature of the passage.

## SECTION 4 – PORTABLE EQUIPMENT

Categories		A boat shall have:
**	4.16.2	An effective means to quickly disconnect or sever the standing rigging from the boat.
**	<a href="#">4.17</a>	Boat's Name The boat's name on miscellaneous buoyant equipment, such as lifejackets, cushions, lifebuoys, recovery slings, grab bags, etc.
**	<a href="#">4.18</a>	Retro-Reflective Material Marine grade retro-reflective material on lifebuoys, recovery slings, liferafts and lifejackets.
Mo0,1,2,3 Mu0,1,2,3,4	4.21 <a href="#">4.21.1</a>	Grab Bags A grab bag shall have inherent flotation, at least 0.1 m <sup>2</sup> (1 ft <sup>2</sup> ) area of highly visible colour (e.g. dayglo yellow or orange) on the outside, shall be marked with the name of the boat, and shall have a lanyard and clip. If a grab bag has to accompany a specific life raft, it shall be clearly marked with the identity of its corresponding raft.
Mu3,4	<a href="#">4.21.4</a>	The following shall be either stowed with a liferaft, or in a watertight compartment or a grab bag. The container shall be readily accessible whether or not the boat is inverted:
Mo3Mu3,4 Mo3Mu3,4 Mo3Mu3,4 Mo3Mu3,4		<ul style="list-style-type: none"> <li>a) 3 hand flares,</li> <li>b) watertight strobe light with spare batteries (may be part of the flashlight),</li> <li>c) knife, and</li> <li>d) whistle.</li> </ul>
	4.22	Crew Overboard Identification and Recovery
MoMu1,2,3	<a href="#">4.22.2</a>	GNSS Crew Overboard Position <ul style="list-style-type: none"> <li>a) For boats with only two <u>crewmembers</u>, a GNSS capable of recording a crew overboard position, within 10 seconds, and monitoring that position without having to go below deck.</li> </ul>
MoMu3,4	<a href="#">4.22.3</a>	Lifebuoys <ul style="list-style-type: none"> <li>a) a lifebuoy with a self-igniting light, a whistle, and a drogue within reach of the helmsman and ready for immediate use,</li> <li>e) each inflatable lifebuoy and any automatic device shall be tested and serviced at intervals in accordance with its manufacturer's instructions.</li> </ul>
**	<a href="#">4.22.4</a>	Heaving Line A heaving line, no less than 6 mm (1/4") diameter, 15–25 m (50–75') long, readily accessible to cockpit.
**	<a href="#">4.22.5</a>	Recovery Sling A recovery sling which includes a:
MoMu0,1,2,3 MoMu0,1,2,3 MoMu0,1,2,3 MoMu0,1,2,3		<ul style="list-style-type: none"> <li>a) buoyant line of length no less than the shorter of 4 times <u>L<sub>H</sub></u> or 36m (120'),</li> <li>b) buoyancy section (horseshoe) with no less than 90 N (20#) buoyancy,</li> <li>c) minimum strength capable to hoist a <u>crewmember</u> aboard.</li> </ul>

## SECTION 4 – PORTABLE EQUIPMENT

---

Categories		A boat shall have:
**	<a href="#">4.23</a>	Pyrotechnic and Light Signals A boat shall carry the number and type of flares required by their national safety authority for day and night, flares not older than 4 years.
**		
MoMu0,1,2,3	<a href="#">4.25</a>	Cockpit Knife A strong, sharp knife, in a securely restrained sheath shall be readily accessible from the deck or a cockpit.
**		
MoMu3	<a href="#">4.26</a>	Storm & Heavy Weather Sail Inventory <b>Recommended</b> the following storm & heavy weather sails as specified in <u>OSR</u> 4.27: either a storm trysail or mainsail reefing to reduce the luff by at least 40% (or rotating wing mast if suitable), <b>Recommended</b> .
MoMu0,1,2,3	<a href="#">4.26.3</a>	
MoMu0,1,2,3	<a href="#">4.26.5</a>	heavy weather jib,

## SECTION 4 – PORTABLE EQUIPMENT

### Categories

A boat shall have:

4.27

Storm & Heavy Weather Sail Specifications

Where required by OSR 4.26, the specifications of heavy weather sails shall follow:

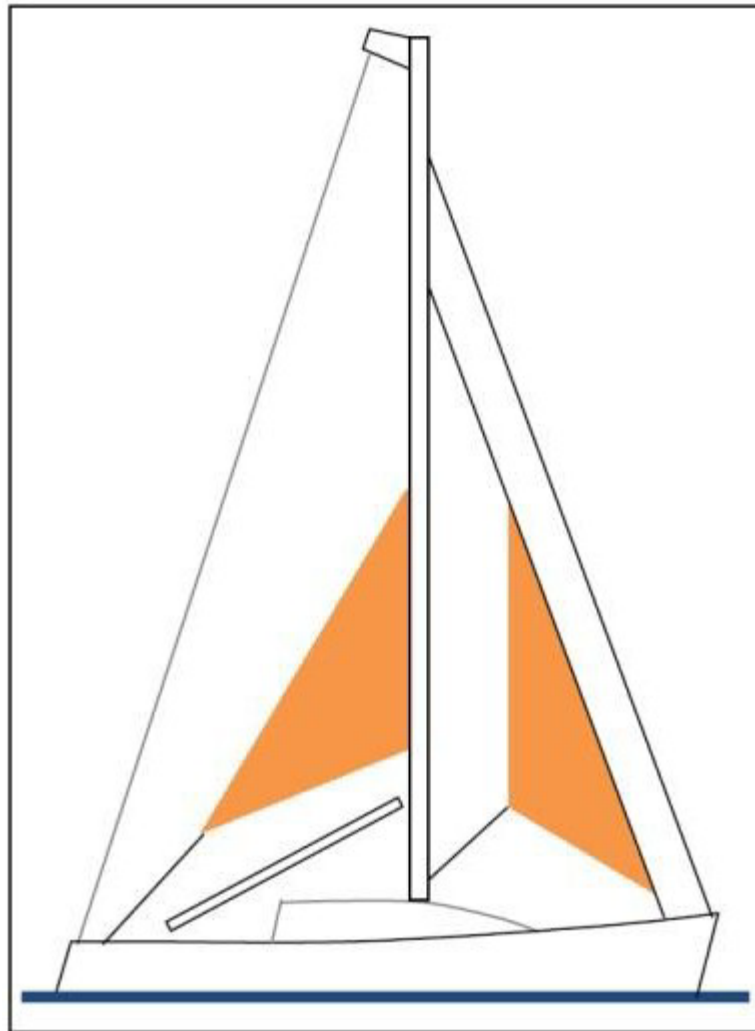


Figure 3 – Storm Sails **Recommended**

#### 4.27.1 Design

\*\*

a) the material of the body of a storm sail purchased after 2013 shall have a highly visible color (e.g. dayglo pink, orange or yellow),

\*\*

b) aromatic polyamides, carbon and similar fibers shall not be used in a trysail or storm jib, but HMPE and similar materials are permitted,

\*\*

c) sheeting positions on deck for each storm and heavy-weather sail,

\*\*

d) sheeting positions for the trysail independent of the boom, and

\*\*

e) **A storm jib may not be set in conjunction with any other sail set forwards of the forward mast spar.**

#### 4.27.2 A Storm Trysail with: **Recommended**

MoMu0,1,2,3

a) area not greater than 17.5% mainsail hoist (P) x mainsail foot length (E),

MoMu0,1,2,3

b) the storm trysail area shall be calculated as  $(0.5 \times \text{leech length} \times \text{shortest distance between tack point and leech})$ ,

## SECTION 4 – PORTABLE EQUIPMENT

Categories	
MoMu0,1,2,3	A boat shall have:
MoMu0,1,2,3	c) no headboard,
MoMu0,1,2,3	d) no battens,
MoMu1,2,3	e) sail number and letters on both sides, as large as practicable,
MoMu0,1,2,3	f) in the case of a boat with an in-mast furling mainsail, the storm trysail shall be capable of being set while the mainsail is furled, and
MoMu0,1,2,3	g) designed to provide propulsion and steerage in Beaufort scale 8 and on all points of sail.
4.27.3	A Heavy Weather Jib (or Heavy Weather Sail in a Boat with no Forestay) with:
**	<b>Recommended</b>
**	a) area, in unreefed condition, not greater than 13.5% height of the foretriangle squared,
**	b) heavy weather jib area shall be calculated as: $(0.255 \times \text{luff length} \times (\text{luff perpendicular} + 2 \times \text{half width}))$ ,
**	c) readily available method, independent of a luff groove, to attach to the stay, and
**	d) designed to provide propulsion and steerage in Beaufort scale 6 and on all points of sail.

## SECTION 5 – PERSONAL EQUIPMENT

Categories		Each <u>crewmember</u> shall have:
**	<a href="#">5.01</a>	Lifejacket
**		Sail Canada prescribes:
**		a gas inflatable lifejacket manufactured after 2011, with at least 150N buoyancy, compliant with either UL1180 or UL1180C, and which shall be fitted with items a) through e) below, each equivalent to or complying with ISO 12402-3 or ISO 12402-8:
**		or
**	5.01.1	A gas inflatable lifejacket which shall comply with <u>ISO</u> 12402-3 (Level 150) and have been manufactured after 2011. It shall be fitted with the following, each complying with <u>ISO</u> 12402-3 or <u>ISO</u> 12402-8:
**		Sail Canada note – ISO 12402 is not currently approved by Transport Canada.
**		a) a manual or automatic gas inflation system,
**		Sail Canada prescribes:
**		• a whistle secured by a cord or line
**		• retro-reflective material
**		b) a ride up prevention system (crotch strap or thigh straps),
MoMu0,1,2,3		c) an emergency position indicating light,
MoMu0,1,2,3		d) a sprayhood, <b>Recommended</b>
MoMu3		It shall also:
MoMu0,1,2,3		e) <b>a deck safety harness (attachment),</b>
MoMu0,1,2,3		Sail Canada prescribes:
MoMu0,1,2,3		• that is integrated with the lifejacket and complies with <u>OSR</u> 5.02 <b>Recommended</b>
**		g) <b>be of the appropriate size range for the <u>crewmember</u> as marked on the PFD,</b> and
**		h) have been indelibly marked with the name of the owner or boat.
MoMu0,1,2,3	<a href="#">5.01.2</a>	A boat shall carry at least one gas inflatable lifejacket spare cylinder and, if appropriate, spare activation head for each type of lifejacket on board.
**	<a href="#">5.01.4</a>	The <i>person in charge</i> shall personally check that each lifejacket has been serviced in accordance with the manufacturer’s recommendation by an approved service station and that the next service date as marked on the lifejacket has not been exceeded.
**		Sail Canada prescribes that where the manufacturer permits the lifejacket owner/user to perform the recommended service, the owner/user is considered to be an approved service station.
	5.02	Deck Safety Harness and Tethers
MoMu0,1,2,3	<a href="#">5.02.1</a>	A harness that complies with <u>ISO</u> 12401 or equivalent.
MoMu0,1,2,3	<a href="#">5.02.2</a>	A <u>tether</u> that shall:
MoMu0,1,2,3		a) comply with <u>ISO</u> 12401 or equivalent,
MoMu0,1,2,3		b) not exceed 2 m (6’-6”) including the length of the hook(s),
MoMu0,1,2,3		c) have self-closing hook(s),

- d) have overload indicator flag embedded in the stitching **Recommended**, and

## SECTION 5 – PERSONAL EQUIPMENT

---

Categories		Each <u>crewmember</u> shall have:
MoMu0,1,2,3		e) be manufactured after 2000.
MoMu0,1,2,3	<a href="#">5.02.3</a>	either:
MoMu0,1,2,3		a) a <u>tether</u> not exceeding 1 m (3'-3") including the length of the hook(s), or
MoMu0,1,2,3		b) an intermediate self-closing hook on a 2 m (6'-6") <u>tether</u> .
MoMu0,1,2,3	5.02.5	A <u>tether</u> which has been overloaded shall be replaced.

SECTION 6 – TRAINING

Categories	6.01	Training <b>Recommended</b>
MoMu3	<a href="#">6.01.3</a>	Sail Canada prescribes that at least 30% but not fewer than two <u>crewmembers</u> , including the <i>person in charge</i> shall have a Sail Canada-accredited Coastal Personal Survival Training course, or training accepted as equivalent by the <i>organizing authority</i> , within the five years before the start of the race.
MoMu0,1,2,3	6.01.5	A refresher course may be taken to renew a certificate if the refresher course is completed within 2 years of the expiration of the individual’s most recent Offshore Personal Survival Course certificate.
	6.02	Training Topics <b>Recommended</b>
MoMu0,1,2,3	6.02.1	Giving Assistance to Other Craft
MoMu0,1,2,3	6.02.2	Personal Safety Gear, theory and practice
MoMu0,1,2,3	6.02.3	Care and Maintenance of Safety Gear
MoMu0,1,2,3	6.02.4	Fire Precautions and Firefighting, theory and practical
MoMu0,1,2,3	6.02.5	Crew Overboard Prevention and Recovery
MoMu0,1,2,3	6.02.6	Hypothermia, Cold Shock and Drowning
MoMu0,1,2,3	6.02.7	Crew Health
MoMu0,1,2,3	6.02.8	Marine Weather
MoMu0,1,2,3	6.02.9	Heavy Weather
MoMu0,1,2,3	6.02.10	Storm Sails
MoMu0,1,2,3	6.02.11	Damage Control
MoMu0,1,2,3	6.02.12	Search and Rescue Organisation
MoMu0,1,2,3	6.02.13	Pyrotechnics and Signalling Gear, theory and practical
MoMu0,1,2,3	6.02.14	Emergency Communications, theory and practical
MoMu0,1,2,3	6.02.15	Liferafts and Abandon Ship, theory and practical
	<a href="#">6.04</a>	Routine Training Onboard <b>Recommended</b>
**		At least annually the crews shall practice the drills for:
**		a) crew-overboard recovery, and
**		b) abandonment of vessel.
	6.05	Medical Training <b>Recommended</b>
MoMu3,4	<a href="#">6.05.3</a>	At least two <u>crewmembers</u> shall be familiar with First Aid procedures, hypothermia, drowning, cardio-pulmonary resuscitation, and relevant communications systems.